

GVWR: 14,000 - 17,500#

CARGO CAPACITY: 7.2 yd3 (14') - 8.2 yd3 (16')

lbs LOAD CAPACITY: 9,570 - 13,350#

DUMP ANGLE: 40°


available lengths: 14', 16' ← BED width: 83" wide



COUPLERS: Bumper Pull

DUMP SIDE HEIGHTS: 24" (36" or 48" Optional)



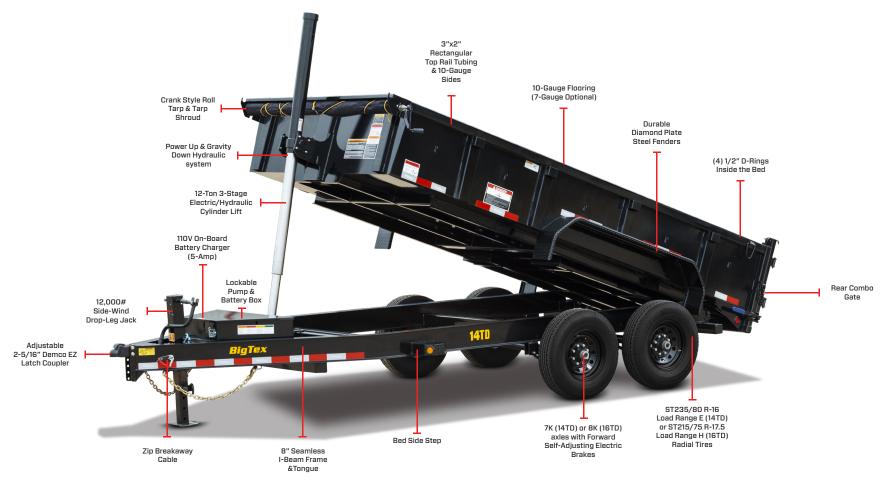



SEAMLESS I-BEAM FRAME

For the ultimate in strength and durability, these models feature a formed I-beam frame with an integral tongue. No cuts. No fishplate. Just a sturdy frame design built to withstand the test of time.



SUPERIOR STRENGTH & CARG SECUREMENT VERSATILITY

Both models boast a 3"x2" rectangular tubing structural top rail for enhanced strength and durability, while stake pockets along the sides offer additional cargo control and compatibility with aftermarket side extensions.



DVANCED TELESCOPIC

Experience a smoother, more efficient lift with our 12-ton cylinder, designed for superior leverage and reduced load leveling concerns, ensuring a hassle-free lifting experience.



EFFORTLESS MAINTENANCE

Our forward self-adjusting brakes make brake maintenance a breeze. The system automatically adjusts the brake shoes as they wear down, eliminating the need for manual adjustments.