

GVWR: 6,000#

WEIGHT: 1,430 - 1,525#




LOAD CAPACITY: 4,475 - 4,570#

● ■ AXLES: Tandem (2 x 3,500#)



LENGTH: 12', 14', 16'








COUPLER: Bumper Pull



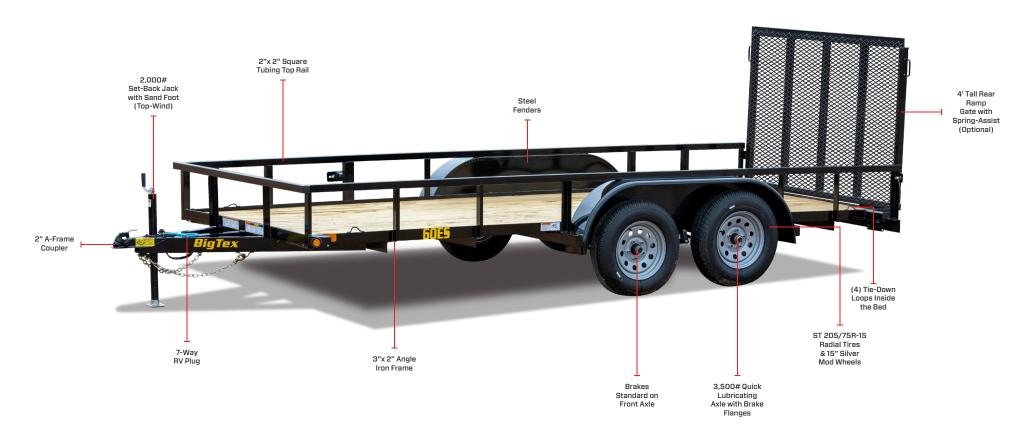



# ENHANCED STRUCTURE

This model features square tubing for increased strength and structure, offering superior resilience compared to typical angle top rails.



## SELF-ADJUSTING

The front axle is equipped with self-adjusting brakes, delivering optimum braking performance with minimal maintenance.



### /ERSATILE 4' SPRING-ASSISTED REAR RAMP GATE

Expand your hauling capabilities with the optional rear ramp gate with spring assist, ideal for transporting a variety of vehicles, including golf carts, ATVs, side-by-sides, and more.



# SET-BACK Jack

The 2,000# Set-Back Jack allows the tailgate of the tow vehicle to be lowered without the top of the jack damaging the tailgate.